

THIRD-ORDER LEVELING
NATIONAL GEODETIC VERTICAL DATUM OF 1929

35-078-43
FUQUAY SPRINGS QUADRANGLE
146 NORTH CAROLINA
N3530-W7845/15
DIAGRAM NI 17-3
RALEIGH

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


Chatham, Harnett, Lee and Wake Counties

Final adjustment of 1973

Edition of 1/5/76

PR: DSW/jyk

NGVD 20
Elevations

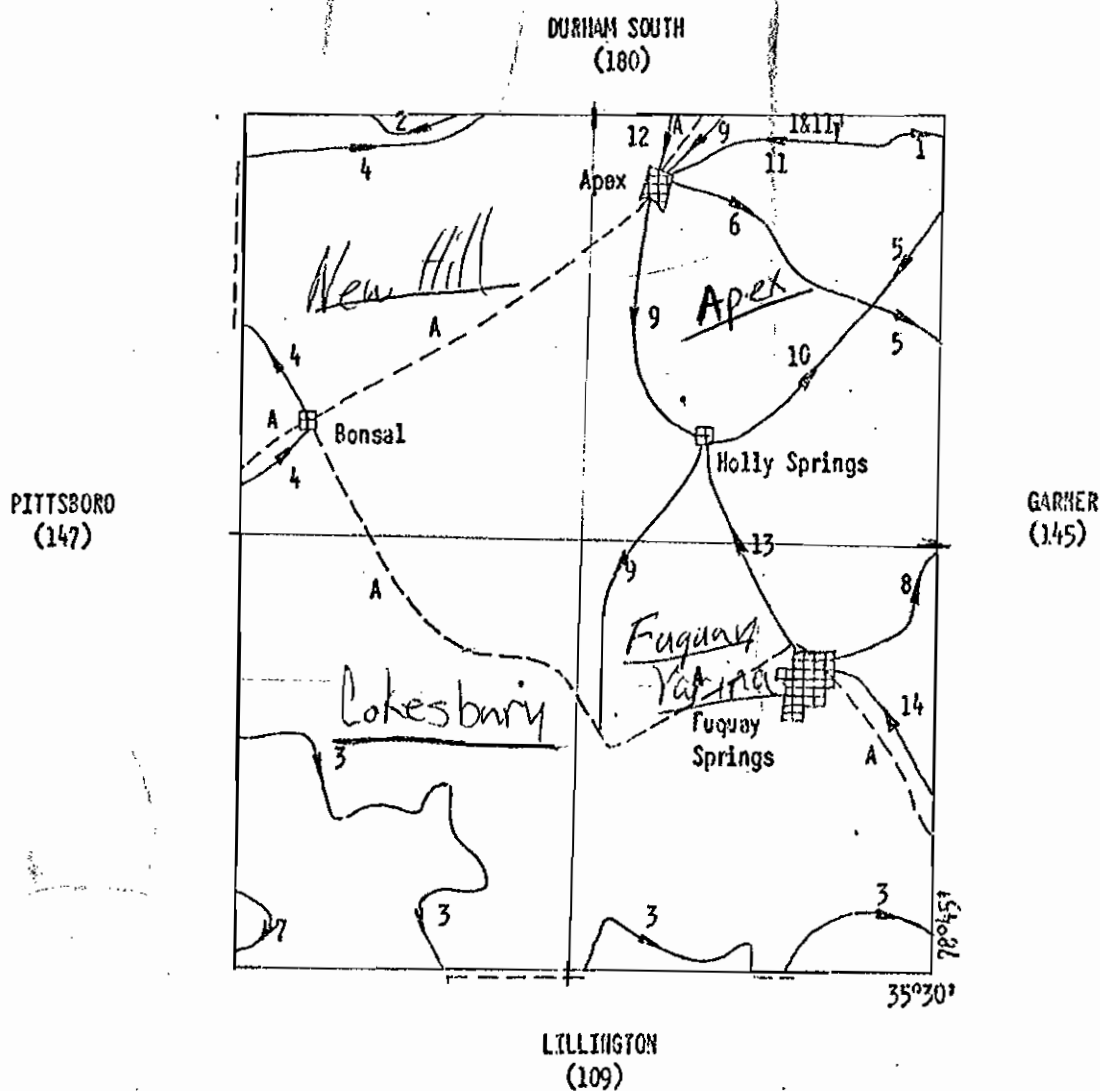

NGS (USC&GS) VERTICAL CONTROL DATA

A. Quadrangle 350784

6A

61 DRD . DESTROYED NOTE: ELEVATION WAS TRANSFERRED TO THREE TEMPORARY POINTS BEFORE MARK WAS DESTROYED BY NEW BRIDGE CONSTRUCTION THE ELEVATION OF STATION 61 DRD RESET WAS ESTABLISHED FROM THESE TEMPORARY POINTS.

	<u>ELEVATION</u>
61 DRD RESET (1999)	93.337 METERS
	306.223 FEET

WMK OCTOBER 1, 1999

146 NORTH CAROLINA
FUQUAY SPRINGS QUADRANGLE

35-078-43
N3530-47845/15

146

INDEX OF PERMANENT MARKS

<u>MARK (USGS)</u>	<u>PAGE NO.</u>	<u>NCGS (Cont'd)</u>	<u>PAGE NO.</u>
14 BC 1938	3,10	FLYING 1972	11
16 BC 1938	3	LANGDON 1972	11
3 DRD 1960 301	3		
4 DRD 1960 180	4		
5 DRD 1960 405	4		
6 DRD 1960 405	4		
7 DRD 1960 412	4		
11 DRD 1960 198	5		
12 DRD 1960 351 <i>MARK RESET NO VALID ELEV. 12/83</i>	5		
13 DRD 1960 213	5		
19 DRD 1960 281	5		
20 DRD 1960 297	5		
23 DRD 1960 343	6		
26 DRD 1960 412 <i>MARK DESTROYED 8/12-99</i>	7		
27 DRD 1960 329	7		
35 DRD 1960 190	7		
52 DRD 1960 500	7,8,10		
53 DRD 1960 480	8		
54 DRD 1960 351	8		
55 DRD 1960 429	8		
56 DRD 1960 307	9		
57 DRD 1960 469	9		
58 DRD 1960 323	9		
61 DRD 1960 308	6		
64 DRD 1960 480	7		
84 DRD 1960 357	11		
166 DRD 1960	10		
167 DRD 1960 347	10		
99 MAX 1972 406	11		

NGS

U 92 1935	9
Y 92 1935	7,10,11
BAPTIST 1957	4
BAPTIST NO 1 1957	4
FUQUAY 1957	10
FUQUAY NO 1 1957	10
FUQUAY NO 2 1957	10
HOLLOMAN NO 1 1957	8
HOLLOMAN NO 2 1957	8
HOLLY SPRINGS 1957	8,9,11
HOLLY SPRINGS RM NO 1 1957	8
SUNSET 1957	9
SUNSET NO 1 1957	9
SUNSET NO 2 1957	9
WHITE OAKS 1957	6
WHITE OAKS NO 1 1957	6
WHITE OAKS NO 2 1957	6

N. C. GEODETIC SURVEY

H+C E 5 13 1940	6,9	NGVD 29
N-C 54	3	Elevations
NC 9	8	
NC 232	4	

FUQUAY SPRINGS
Book B 7852

146 NORTH CAROLINA

B. B. Chamblin

1938

	<u>LINE 1.</u>	NGVD 29 Elevations	<u>Feet</u>
B. B. Chamblin, 1938; Book B 7852			
U.E., Cary, 2.4 mi SW. of, along Seaboard Air Line Railroad, thence 2.6 mi E., along old wagon rd.; 2.5 mi S. of Cary, along hwy.; 15 ft N. and 55 ft W. of junction of private T-rd. W.; in root on S. side of 24-in. oak tree; copper nail and washer			464.48
Cary, 3.0 mi S. of; 2.5 mi W. of Macedonia Church; 35 ft N. and 85 ft E. of centerline of crossroad; 2 ft N. of telephone pole; in concrete post; standard tablet stamped "14 BC 1938"			135.100 443.503
Reference mark; 210 ft E. of tablet; 40 ft S. of centerline of rd.; 40 ft E. of pasture gate; in root on N. side of 10-in. pine tree; copper nail and washer			431.53
U.E., Macedonia Church, 2.0 mi W. of; 90 ft E. and 35 ft S. of centerline of crossroad; in root on N. side of twin oak tree; copper nail and washer			418.43

LINE 2.

B. B. Chamblin, 1938; Book B 7852

Salom Baptist Church, 4.1 mi W. of; 1.8 mi S., thence 0.9 mi SW. of Green Level; 0.7 mi N., thence 2.3 mi E. of Olive Chapel Baptist Church; 55 ft N. and 30 ft E. of junction of rd. NW.; 2 ft N. of powerline pole 282; in concrete post; standard tablet stamped "16 BC 1938" (Reported destroyed, 1972)			353.162
Reference mark; 140 ft SW. of tablet; 35 ft S. and 75 ft W. of rd. junction; in base of crooked 8 in. gum tree; copper nail and washer			347.13
U.E., Olive Chapel, 0.7 mi N. of, thence 1.7 mi E.; 475 ft W. of centerline of junction of T-rd. N.; about 50 ft E. of centerline of intersection of dim rd. NE.; 18 ft N. of centerline of rd.; on W. end of N. headwall of culvert; chiseled square			104.89 344.14
Cary, 10.5 mi SW. of, along county soil rd.; 0.7 mi S. of U. S. Highway 64; N. of junction of T-rd. at Olive Chapel; E. of Wake-Chatham County line; 73 ft E. of centerline of old Durham-Fayetteville Road; in frontyard of residence of A. T. Goodwin; in concrete post; North Carolina Geodetic Survey standard disk stamped "N-C 54" (Not found, 1974)			99.335 325.903
Reference mark; 120 ft W. of tablet; 40 ft W. of centerline of rd.; in root on NE. side of 24-in. oak tree; copper nail and washer			323.55

LINE 3.

D. R. Deane, 1960; Book AV 816

1	17	5.99	Reference mark; at Corinth Overhead; on SE. wingwall; chiseled square	300.54
1	17	6.01	Corinth, about 0.1 mi W. of corporate limit; in NE. wingwall of Corinth Overhead over S.A.L. RR.; standard tablet stamped "3 DRD 1960 301"	301.306
1	19	7.29	U.E., at RR. crossing; on concrete base of E. signal tower; chiseled square	241.02
1	21	8.16	Reference mark; 100 ft N. of tablet; on NW. wingwall; chiseled square	180.15

FUQUAY SPRINGS			146 NORTH CAROLINA	NGVD 29 Elevations	Feet
<u>LINE 3 (Cont'd.)</u>					
1	21	8.20	Corinth, 2.0 mi SE. of; in SW. wingwall of concrete bridge over Buckhorn Creek; standard tablet stamped "4 DRD 1960 180"		180.190
1	25	10.51	Reference mark No. 1; in centerline of junction of T-rd. N.; copper nail and washer		401.84
1	25	10.51	Duncan, 6.0 mi W. of; 5.0 mi E. of Corinth, along State Highway 42; at Harnett County line; 89 ft N. and 29 ft E. of T-rd. N.; 12 ft W. of centerline of woods rd. NE.; in concrete post; standard tablet stamped "5 DRD 1960 405"		405.006
1	25	10.51	Reference mark No. 2; 110 ft NE. of centerline of T-rd. N.; top of small boulder		404.62
1	30	13.64	Reference mark; on S. end of first step at E. entrance to farm residence; chiseled square		405.51
1	30	13.66	Duncan, 4.0 mi W. of, along State Highway 42, thence 1.5 mi S.; 100 ft W. of centerline of rd.; at farm residence; in E. end of first step; standard tablet stamped "6 DRD 1960 405"		405.016
1	36	16.17	Reference mark; 100 ft N. of tablet; at entrance to abandoned church; on N. end of first step; chiseled square		403.37
1	36	16.20	Duncan, 3.9 mi SW. of, thence 1.6 mi W.; 118 ft E. of centerline of rd.; 2.5 ft W. of NW. corner of Chalk Level Methodist Church; in concrete post; standard tablet stamped "7 DRD 1960 412"		411.705
<u>[Jogs into Lillington quadrangle]</u>					
1	51	23.90	Reference mark No. 1; 40 ft W. of utility pole; 36 ft SSE. of centerline of rd.; in concrete post; NGS standard reference mark disk stamped "BAPTIST NO 1 1957"		372.343
1	51	23.92	Lillington, 7.5 mi NW. of; 5.5 mi SW. of Fuquay Springs; on property of Baptist Grove Church; 33 ft N. of centerline of sand rd.; 22 ft S. of S. side of church; in concrete post; NGS standard triangulation station disk stamped "BAPTIST 1957"		371.107
1	51	23.94	Reference mark No. 2; 32 ft NW. of centerline of rd.; 19 ft NE. of centerline of sand rd.; in concrete post; North Carolina Geodetic Survey standard disk stamped "NC 232" (Not found, 1974)		371.848
1	53	25.21	Reference mark; 40 ft N. of tablet; N. end of culvert over creek		198.65

FUQUAY SPRINGS

146 NORTH CAROLINA

LINE 3 (Cont'd.)

Feet

- 1 53 25.23 Duncan, 2.0 mi S. of, along County Road 1409, thence 4.2 mi S., along County Road 1412 to crossroad at Baptist church, thence 1.3 mi E.; 2.0 mi W. of Chalybeate; in top of S. end of double conduit culvert over creek; standard tablet stamped "11 DRD 1960 198" (Destroyed, 1964) 197.913
- 1 58 27.20 Reference mark; 45 ft E. of tablet; at front of church; on E. end of concrete sidewalks; chiseled square 349.84
- 1 50 27.23 Chalybeate; at junction of Y-rd.; at entrance to Chalybeate Springs Baptist Church; in N. end of steps; standard tablet stamped "12 DRD 1960 351" MARK RESET BY BRICK MASONS DURING CONST. OF NEW STEPS - ELEV. UNRELIABLE 350.414
- [Jogs into Lillington quadrangle]
- 1 66 31.49 Chalybeate, 2.0 mi E. of, along County Road 1441; 2.0 mi W. of Angiors, along County Road 1441; in SE. corner of concrete seat of bridge over creek; standard tablet stamped "13 DRD 1960 213" (Reported destroyed, 1974) 212.976
MARCH 4, 2004 (WLL) FOUND STEM IN S.E. COR. OF BRIDGE LOCATED 2.8 MI E. OF US-401 LINE 4. AND 1.45 MI W. OF NC-55 ON SR-1441 (W. W. ME ST) DISK NOT FOUND.
- APV*
- D. R. Deane, 1960; Book AV 816
- 2 4 2.48 Reference mark; 630 ft S. of signal tower No. 1816; on concrete base; chiseled square 274.44
- 2 4 2.60 Merry Oaks, about 1.0 mi NE. of; 0.5 mi N. of milepost No. 182, along S.A.L. RR.; 630 ft N. of signal tower No. 1816; 22 ft W. of centerline of main track; in concrete base of signal tower No. 1815; standard tablet stamped "19 DRD 1960 281" 281.140
- 2 8 4.97 Reference mark; 80 ft S. of tablet; in centerline of RR. crossing; copper nail and washer 296.26
- 2 8 4.99 Bonsal, about 1.0 mi N. of; 80 ft N. and 30 ft E. of RR. crossing; in concrete post; standard tablet stamped "20 DRD 1960 297" 296.929

[Jogs into Pittsboro quadrangle]

SEE
WLL 12/01-2003
RECOVERY
(ENCLOSED W/146 DATA)

FUQUAY SPRINGS

146 NORTH CAROLINA

LINE 3 (Cont'd.)

Feet

- 1 53 25.23 Duncan, 2.0 mi S. of, along County Road 1409, thence 4.2 mi S., along County Road 1412 to crossroad at Baptist church, thence 1.3 mi E.; 2.0 mi W. of Chalybeate; in top of S. end of double conduit culvert over creek; standard tablet stamped "11 DRD 1960 198" (Destroyed, 1964) 197.913
- 1 58 27.20 Reference mark; 45 ft E. of tablet; at front of church; on E. end of concrete sidewalks; chiseled square 349.84
- 1 50 27.23 Chalybeate; at junction of Y-rd.; at entrance to Chalybeate Springs Baptist Church; in N. end of steps; standard tablet stamped "12 DRD 1960 351" *MARK RESET BY BRICK MASONS DURING CONST. OF NEW STEPS. CLEV. UNRELIABLE* 350.414
[Jogs into Lillington quadrangle]
- 1 66 31.49 Chalybeate, 2.0 mi E. of, along County Road 1441; 2.0 mi W. of Angiers, along County Road 1441; in SE. corner of concrete seat of bridge over creek; standard tablet stamped "13 DRD 1960 213" (Reported destroyed, 1974) 212.976

LINE 4.

D. R. Doane, 1960; Book AV 816

- 2 4 2.48 Reference mark; 650 ft S. of signal tower No. 1816; on concrete base; chiseled square 274.44
- 2 4 2.60 Morry Oaks, about 1.0 mi NE. of; 0.5 mi N. of milepost No. 182, along S.A.L. RR.; 630 ft N. of signal tower No. 1816; 22 ft W. of centerline of main track; in concrete base of signal tower No. 1815; standard tablet stamped "19 DRD 1960 281" 281.140
- 2 8 4.97 Reference mark; 80 ft S. of tablet; in centerline of RR. crossing; copper nail and washer 296.26
- 2 8 4.99 Bonsal, about 1.0 mi N. of; 80 ft N. and 30 ft E. of RR. crossing; in concrete post; standard tablet stamped "20 DRD 1960 297" 296.929

[Jogs into Pittsboro quadrangle]

20 DRD (WLL) DEC. 01-2003 - GOOD - POOR ^(TREES) GPS - STAMPING IS ALMOST UN-READABLE - R/R ABANDONED

12' ± N OF POW POLE (25K CT24 AC)

19' ± S/E OF SOIL D/W TO HOUSE (57.93)
NGVD 29 Elevations

PROTECTS 6-INCHES AND ABOUT 1' LOWER THAN E OF SR-1008 (BEAVER CREEK RD)

@/NEAR EASTERN R/W OF SR-1008

ABOUT 100 YDS N. OF BLACKBURN DR. (WEST-PVT)

NO VHS

FUQUAY SPRINGS

146 NORTH CAROLINA

LINE 4 (Cont'd.)

			<u>Feet</u>
2	22	12.85	81.47 267.33
2	24	14.10	104 338.34
2	24	14.12	104.616 343.227
2	27	15.46	352.222
2	27	15.47	352.066
2	27	15.50	351.127

LINE 5.

D. R. Deane, 1960; Book AV 816

2	47	7.06	308.60
2	47	7.07	93.824 307.820
2	49	8.11	138.729 455.146

FUQUAY SPRINGS
Book AV 816

146 NORTH CAROLINA

D. R. Deane

1960

LINE 6.

NGVD 29
Elevations

Feet

D. R. Deane, 1960; Book AV 816

2	64	0.00	Apex; on S. corner of SW. concrete base of water tank; in concrete base; standard tablet stamped "52 DRD 1960 500"	499.927 141.36
2	66	1.66	U.E., at N. end of bridge; on W. concrete wheelguard; chiseled square	463.79
2	68	2.86	Reference mark; on NE. concrete foot of Apex Lookout Tower; chiseled square	146.448 480.30
2	68	2.87	Apex Lookout Tower; about 3.5 mi ESE. of Apex; at NW. corner of base of stairway; in concrete; standard tablet stamped "64 DRD 1960 480" - not found	146.448 480.471
2	73	5.61	U.E., in centerline of crossroad; copper nail and washer	424.60

LINE 7.

D. R. Deane, 1960; Book AV 816

3	37	6.82	Broadway, 6.6 mi NE. of; 8 ft lower than rd.; in SE. corner of concrete base on E. side of bridge over Fall Creek; standard tablet stamped "35 DRD 1960 190"	190.136
---	----	------	--	---------

LINE 8.

D. R. Deane, 1960; Book AV 816

4	1	0.00	"Y 92 1935" (NGS)	420.252
4	2	1.44	U.E., 42 ft S. of, and level with centerline of U. S. Highway 401; on SW. corner of concrete gasoline pump foundation; chiseled square	126.71 415.73
4	3	1.98	Fuquay Varina, 2.0 mi NE. of, along U. S. Highway 401; at Norfolk and Southern Railway overpass; 4 ft S. of, and 0.5 ft lower than S. rail; in SE. end of concrete abutment; standard tablet stamped "26 DRD 1960 412" AUG. 12, 1999 - DESTROYED - NEW R/R BRIDGE OVER US-401 (NOW 4-LANE DIVIDED).	125.736 412.520
4	5	3.28	Fuquay Varina, 2.1 mi NE. of, along U. S. Highway 401, thence 1.2 mi N., along county rd.; 0.2 mi N. of American Legion Pond; in NE. wingwall of bridge at pond spillway; standard tablet stamped "27 DRD 1960 329"	100.448 329.552

LINE 9.

D. R. Deane, 1960; Book AV 816

4	39	4.80	U.E., on NE. corner of concrete base of signal post No. 1699; chiseled square	138.0 452.74
---	----	------	---	-----------------

FUQUAY SPRINGS			146 NORTH CAROLINA	NGVD 29 Elevations	Feet
<u>LINE 9 (Cont'd.)</u>					
4	40	5.47	U.E., on SE. corner of concrete base of switch box No. T-10384A; chiseled square		148.56 487.40
4	41	6.11	Reference mark; 50 ft NE. of tablet; on E. corner of NE. concrete base of water tank; chiseled square		152.37 499.90
4	41	6.12	Apex; in S. corner of SW. concrete base of water tank; standard tablet stamped "52 DRD 1960 500" (Also described in line 6)		499.927
4	43	6.88	Reference mark; about 125 ft SE. of tablet; on NE. corner of bottom step at E. entrance to high school; chiseled square		477.36
4	43	6.91	Apex; in NW. corner of concrete step at N. entrance to consolidated high school; standard tablet stamped "53 DRD 1960 480" <u>To BE DESTROYED BY CURSIVE</u> ^{9/15/28} _{Two}		146.179 479.589
4	47	9.06	Apex, 2.0 mi S. of; 72 ft W. of, and 2 ft higher than rd. at driveway E.; at NE. corner of residence of C. E. Johnson Jr.; in concrete sidewalk; standard tablet stamped "54 DRD 1960 351"		107.178 351.435
4	51	11.71	Holly Springs, 1.3 mi NW. of; 72 ft S. of, and 1 ft lower than junction of Y-rd. N.; in concrete post; standard tablet stamped "55 DRD 1960 429" (Not found, 1974)		130.85 429.31
4	54	13.34	Holly Springs; 240 ft NE. of NE. corner of Baptist Church; 130 ft N. and 18 ft W. of, and level with junction of T-rd. W.; in concrete post; NGS standard reference mark disk stamped "HOLLY SPRINGS RM NO 1 1957"		SEE NCRS 449.629 INDE
4	54	13.34	Holly Springs; 80 ft NE. of NE. corner of Baptist Church; 33 ft S. and 22 ft W. of, and level with junction of T-rd. W.; in concrete post; NCGS standard disk stamped "NC 9"		450.900
4	54	13.34	Holly Springs; 150 ft N. of NE. corner of Baptist Church; 55 ft N. and 41 ft W. of, and level with junction of T-rd. W.; in concrete post; NGS standard triangulation station disk stamped "HOLLY SPRINGS 1957"		449.823
4	60	17.09	Holly Springs, 3.8 mi SW. of; 3.0 mi N. of Duncan; 300 ft N. and 200 ft E. of, and 3 ft higher than centerline of junction of T-rd. NW.; 30 ft NW. of rd.; in concrete post; NGS standard reference mark disk stamped "HOLLIDIAN NO 2 1957"		SEE 448.080
4	60	17.09	Holly Springs, 3.8 mi SW. of; 3.0 mi N. of Duncan; 225 ft N. and 400 ft E. of, and 6 ft higher than centerline of junction of T-rd. NW.; 150 ft NE. of rd.; in concrete post; NGS standard reference mark disk stamped "HOLLIDIAN NO 1 1957"		137.552 451.284
4	62	18.18	Reference mark; 70 ft NW. of tablet; on NW. corner of W. headwall of culvert; chiseled square		93.56 306.958

FUQUAY SPRINGS		146 NORTH CAROLINA	NGVD 29 Elevations	Feet
<u>LINE 9 (Cont'd.)</u>				
4	62	18.20	Duncan, 2.0 mi N. of; 30 ft E. of, and 2 ft lower than rd.; in S. corner of E. headwall of culvert over Buckhorn Creek; standard tablet stamped "56 DRD 1960 307"	307.087
4	66	20.72	Reference mark; 120 ft N. of tablet; on SE. corner of concrete gasoline pump base at store of L. V. Pegras; chiseled square	470.949
4	66	20.74	Duncan; 48 ft S. and 63 ft E. of, and level with centerline of crossroad; 2 ft E. of W. gasoline pump at Griffin and Son store; in concrete base; standard tablet stamped "57 DRD 1960 469"	468.479
4	67	21.18	"U 92 1935" (NGS)	430.340
<u>LINE 10.</u>				
D. R. Deane, 1960; Book AV 816				
4	68	0.00	"HOLLY SPRINGS 1957" (Described in line 9)	449.823
4	70	1.85	Reference mark; 42 ft NE. of tablet; on N. headwall of bridge; chiseled square	322.859
4	70	1.86	Holly Springs, 1.8 mi NE. of; in W. end of S. headwall of bridge over Middle Creek; standard tablet stamped "58 DRD 1960 323"	98.412 m 322.874
4	75	0.51	Holly Springs, 4.3 mi NE. of, thence 0.5 mi NW.; 80 ft S. and 165 ft W. of, and 3 ft lower than drive SW.; 65 ft W. of NW. corner of residence of H. R. Jones; in concrete post; NGS standard reference mark disk stamped "SUNSET NO 2 1957"	486.974
4	75	0.51	Holly Springs, 4.3 mi NE. of, thence 0.5 mi NW.; 25 ft S. of, and 1 ft higher than drive SW.; 105 ft E. of SE. corner of residence of H. R. Jones; in concrete post; NGS standard reference mark disk stamped "SUNSET NO 1 1957" (Disturbed, 1974)	483.923
4	75	0.51	Holly Springs, 4.3 mi NE. of, thence 0.5 mi NW.; 40 ft W. of, and level with drive SW.; 105 ft N. of NE. corner of residence of H. R. Jones; in concrete post; NGS standard triangulation station disk stamped "SUNSET 1957"	486.990
4	78	5.27	U.F., 25 ft E. of, and level with rd.; on SE. headwall of culvert; chiseled square	110.64 363.00
4	80	7.42	"N-C E 5 13 1940" (Described in line 5) (NCGS) (Reported destroyed, 1974)	455.146

FUQUAY SPRINGS
Book AV 816

146 NORTH CAROLINA

D. R. Deane

1960

			<u>LINE 11.</u>	NGVD 29 Elevations	1960	<u>Feet</u>
D. R. Deane, 1960; Book AV 816						
14	39	2.76	Reference mark; 35 ft W. of tablet; on SW. wheelguard of bridge			138.67 454.94
14	39	2.76	Cary, 2.4 mi S. of; 4.0 mi E. of Apex; on SE. end of bridge over U. S. Highway 1; in wheelguard; standard tablet stamped "166 DRD 1960"			138.696 455.037
14	40	2.98	"14 BC 1938" (Described in line 1)			443.62
14	41	3.85	U.E., 30 ft N. of, and 2 ft lower than rd.; on NW. corner of headwall of culvert; chiseled square			102.90 337.60
14	42	4.70	Reference mark; 35 ft W. of tablet; on W. corner of headwall of culvert			346.98
14	42	4.70	Apex, 2.1 mi E. of; 27 ft N. of, and 3 ft lower than rd.; in E. corner of headwall of culvert over Williams Creek; standard tablet stamped "167 DRD 1960 347"			105.760 346.982

LINE 12.

D. R. Deane, 1960; Book AV 816

14	71	8.70	"52 DRD 1960 500" (Described in lines 6 and 9)			499.927
----	----	------	--	--	--	---------

LINE 13.

D. R. Deane, 1960; Book AV 816

20	48	0.00	"Y 92 1935" (NGS) (Also in line 8)			420.252
20	49	1.23	Fuquay Varina, 1.0 mi NW. of, along State Highway 55; 114 ft SW. of WFVG radio station tower; 34 ft SE. of telepole post; in concrete post; NGS standard reference mark disk stamped "FUQUAY NO 1 1957"			450.902
20	50	1.28	Fuquay Varina, 1.0 mi NW. of, along State Highway 55; 275 ft S. of WFVG radio station tower; 26 ft NW. of NE. corner of barn; in concrete post; NGS standard reference mark disk stamped "FUQUAY NO 2 1957"			452.285
20	51	1.30	Fuquay Varina, 1.0 mi NW. of, along State Highway 55; 265 ft SW. of WFVG radio mast; 78 ft S. of telephone post; 20 ft W. of centerline of track rd.; in concrete post; NGS standard triangulation station disk stamped "FUQUAY 1957"			452.363
20	52	1.98	U.E., on S. end of concrete gasoline pump base at J. M. Stephenson's grocery; chiseled square			132.27 433.955

FUQUAY SPRINGS

146 NORTH CAROLINA

NGVD 29
ElevationsLINE 13 (Cont'd.)

Feet

20	54	2.91	Fuquay Varina, 2.4 mi NW. of, along State Highway 55; 2.0 mi S. of Holly Springs; 16 ft W. of, and 2 ft lower than centerline of rd.; in N. end of W. headwall of concrete culvert over Bassal Creek; standard tablet stamped "84 DRD 1960 357"	1088.43 357.095
20	57	5.30	"HOLLY SPRINGS 1957" (Described in line 9) (Also in line 10)	449.823

LINE 14.

Max. K. Weber, 1972; Book AV 1650

2	12	10.91	Angier, approximately 2.8 mi NNW. of; from intersection of State Highways 55 and 210; along Highway 55 for 2.85 mi to station on right; 0.5 mi NW. of intersection with State Route 2763; approximately 40 ft W. of NW. edge of Angier Airport runway (dirt); approximately 75 ft SE. of centerline of dirt rd. entrance (E.); in concrete post projecting 0.1 ft above ground; North Carolina Geodetic Survey standard traverse disk stamped "FLYING 1972"	351.101
2	13	11.44	Angier, approximately 3.2 mi NNW. of; intersection of Highway 55 and 210; N. along Highway 55 for 3.35 mi to station on left on shoulder of rd.; 0.1 mi N. of intersection with State Route 2780; 0.1 mi SW. of RR. overpass; approximately 50 ft E. of old Highway 55 roadbed on crest of 30-ft embankment; in concrete post 0.3 ft below ground; NCGS standard traverse disk stamped "LANGDON 1972"	383.314
2	15	13.14	Holland; 0.1 mi NE. of crossroad; 72.0 ft W. of grade crossing (northwestern most of two); 70.8 ft WNW. of centerline of Route 1301; 45.3 ft SW. of SW. rail; 1.8 ft NE. of fence line; 1.5 ft N. of power pole; in concrete post projecting 0.2 ft.; standard tablet stamped "99 MAX 1972 406"	405.935
2	17	14.81	"V 92 1935" (NGS) (Also in lines 8 and 13)	420.252