

# 207

3<sup>rd</sup>-ORDER LEVELING  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

36-077-33  
ESSEX QUADRANGLE  
207 NORTH CAROLINA  
N3600-W7745/15  
DIAGRAM NJ 12-10  
NORFOLK

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Edgecombe, Halifax, Nash and Warren Counties

Final adjustment of 1972

Edition of 3/11/76


PR: WSM/jyk

NGVD 29  
Elevations

LITTLETON  
(236)

CASTALIA  
(208)

ENFIELD  
(205)

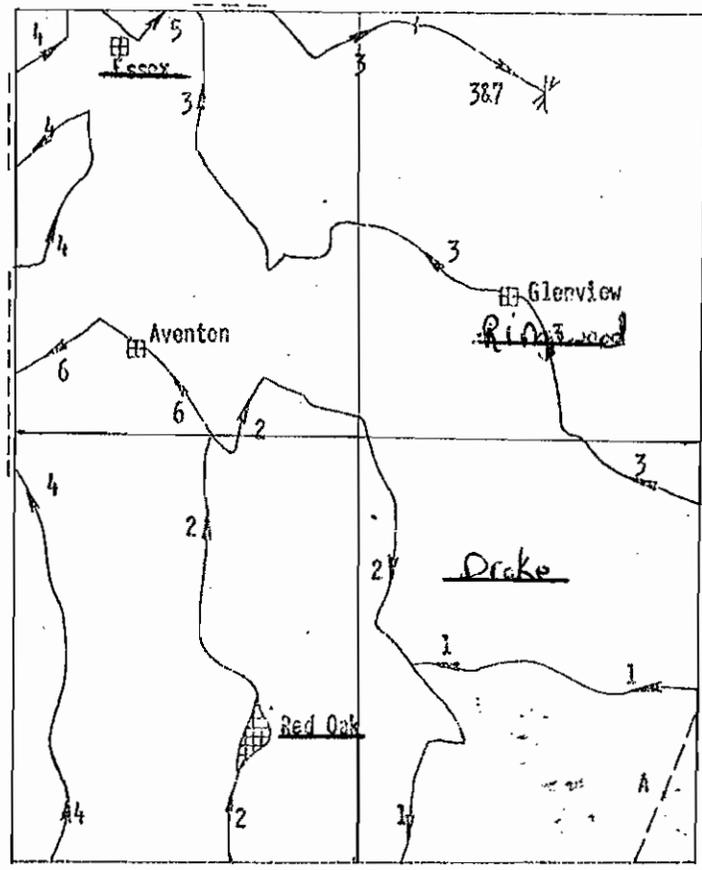

36°00'

ROCKY MOUNT  
(176)

HQS (USC&GS) VERTICAL CONTROL DATA

- A. Quadrangle 360773
- \* Tied to 30th Engineers leveling

NORTH CAROLINA  
ESSEX QUADRANGLE

36-077-33  
N3600-17745/15

007

INDEX OF PERMANENT MARKS

<u>MARK (USGS)</u>	<u>PAGE NO.</u>	<u>MARK (USGS)</u>	<u>PAGE NO.</u>
98 WSM 1955 140	3	129 WSM 1955 225	8
99 WSM 1955 141	3	130 WSM 1955 270	8
100 WSM 1955 145	3,5	131 WSM 1955 168 TT	9
101 WSM 1955 154 <i>P/L 3/83 JDB</i>	3	134 WSM 1955 160 TT	9
102 WSM 1955 194 <i>Good 3/83 JDB</i>	3	135 WSM 1955 300 TT	9
105 WSM 1955 132	4	139 WSM 1955 274	9
106 WSM 1955 212 <i>P/L 3/83 JDB</i>	4	140 WSM 1955 RESET 1976	10
107 WSM 1955 187	4	141 WSM 1955 239	10
108 WSM 1955 18	4	69 CRH 1972 276	10
109 WSM 1955 188	4	70 CRH 1972 256	10
110 WSM 1955 204	4,10	71 CRH 1972 227	10
111 WSM 1955 207	5		
112 WSM 1955 212	5	<u>USED</u>	
113 WSM 1955 188	5	30TH ENGRS MOH 16	8
114 WSM 1955 194	5	ESSEX NC 43 30TH ENGR	9
116 WSM 1955 137	6	C OF E MOH 25	8
117 WSM 1955 159	6	C OF E MOH 26	8
118 WSM 1955 198	6	C OF E RM 1 STORE NC 1945	8
119 WSM 1955 254	6	C OF E RM 3 STORE NC 1945	9
E 119 WSM 1955 138	6		
120 WSM 1955 200	6	<u>HGS</u>	
121 WSM 1955 217	6	H 35 1932	3
122 WSM 1955 238	7	MAH 1933	5
124 WSM 1955 182	7	PETTIT 1933	8,10
125 WSM 1955 281	7		
126 WSM 1955 259	7		
127 WSM 1955 133	7,10		

NGVD 29  
Elevations

3  
ESSEX  
Book AV 424NGVD 29  
Elevations

NORTH CAROLINA

W. S. Monk

1955

LINE 1.Foot

W. S. Monk, 1955; Book AV 424

"H 35 1932" (HGS)

131.325

U.E., Battleboro, 1.2 mi W. of; 50 ft SW. of, and 3 ft above junction of lane S.; in root on S. side of 28-in. elm tree; copper nail and washer

135.47

Battleboro, 2.4 mi W. of; 23 ft N. and 3/40 ft W. of, and 3 ft lower than T-rd. S.; in W. end of concrete headwall of culvert; standard tablet stamped "98 WSM 1955 140"

140.001

Reference mark; 0.26 mi W. of tablet; on W. end of N. headwall of concrete culvert; chiseled cross

125.75

U.E., Battleboro, 3.8 mi W. of; at drain; 20 ft N. of rd.; on center of concrete headwall of culvert; chiseled cross

116.47

Battleboro, 4.3 mi W. of; 50 ft S. and 35 ft W. of, and level with T-rd. E.; 2 ft S. of power pole No. 99; in concrete post; standard tablet stamped "99 WSM 1955 141"

141.340

Reference mark; 0.16 mi S. of tablet; 12 ft N. and 270 ft W. of T-rd. W.; in root on NE. side of 14-in. walnut tree; copper nail and washer

135.96

U.E., Battleboro, 5.7 mi W. of; 20 ft S. and 260 ft E. of, and 1 ft above junction of lane N.; in root on SE. side of 18-in. gum tree; copper nail and washer

158.95

Battleboro, 6.5 mi W. of; 1.4 mi W., thence 1.8 mi N. of Drake; 20 ft N. and 16 ft W. of junction of rd. E.; in center of concrete headwall of culvert; standard tablet stamped "100 WSM 1955 145"

144.974

Reference mark; 180 ft W. of tablet; 25 ft S. of drive; in root on N. side of 30-in. oak tree; rail spike

149.09

U.E., Drake, 1.4 mi W. of, thence 1.0 mi N.; 20 ft S. and 20 ft W. of, and level with crossroad; on center of concrete headwall of culvert; chiseled cross

156.69

Drake, 1.4 mi W. of; 30 ft S. and 42 ft W. of, and 1 ft above crossroad; 11 ft W. of power pole; in concrete post; standard tablet stamped "101 WSM 1955 154" *N/E PROB. LOST 3/83 JDB*

153.905

Reference mark; 55 ft N. of tablet; on W. end of concrete pipe culvert; chiseled cross

150.82

U.E., Drake, 2.0 mi W. of, thence 0.4 mi S.; at drain; 20 ft E. of rd.; on center of E. concrete headwall of culvert; chiseled cross

166.94

Drake, 2.0 mi W. of, thence 1.9 mi S.; at Dortches; 170 ft N. and 54 ft W. of, and 2 ft above crossroad; at store and service station; in SE. corner of concrete walk; standard tablet stamped "102 WSM 1955 194" *Good 3/83 JDB*

193.998

Reference mark; 160 ft S. and 55 ft E. of tablet; on concrete culvert; chiseled cross

190.05

4  
ESSEX  
Book AV 424

NORTH CAROLINA

36-077-33  
W. S. Monk

NGVD 29  
Elevations

1955

LINE 2.

Feet

W. S. Monk, 1955; Book AV 424

U.E., Nashville, 3.1 mi NE. of; at drain; on NE. concrete abutment of bridge crossing Pig Basket Creek; chiseled cross 130.65

Nashville, 3.6 mi NE. of, along Red Oak Road; 20 ft S. and 190 ft E. of, and 4 ft lower than T-rd. E.; in W. end of concrete headwall of culvert; standard tablet stamped "105 WSM 1955 132" 131.787

Reference mark; 40 ft N. of tablet; on W. end of concrete headwall of culvert; chiseled cross 131.96

U.E., Nashville, 4.8 mi NE. of; 110 ft N. and 15 ft E. of, and 4 ft lower than T-rd. NW.; on S. end of concrete headwall of culvert; chiseled cross 175.31

Nashville, 5.8 mi NE. of; at Red Oak; 0.1 mi S. of Methodist Church; 15 ft S. and 60 ft E. of, and 1 ft lower than T-rd. E.; in center of concrete headwall of culvert; standard tablet stamped "106 WSM 1955 212" *PROB. LOST 9/83 JDB* 212.095

Reference mark; 0.1 mi N. of tablet; on N. concrete parapet at Methodist Church; chiseled cross 216.07

U.E., Nashville, 6.8 mi NE. of; at drain; on S. end of W. headwall of concrete culvert; chiseled cross 171.99

Red Oak, 2.0 mi NW. of; 0.11 mi NW. of junction of rd. SW.; at drain; 16 ft NE. of State Highway 43; in center of E. concrete headwall of culvert; standard tablet stamped "107 WSM 1955 187" 186.937

Reference mark; 0.13 mi SW. of tablet; 120 ft NE. of, and 1 ft above T-rd. SW.; in root on SW. side of 24-in. oak tree; copper nail and washer 191.03

U.E., Red Oak, 3.1 mi NW. of; 120 ft S. and 15 ft E. of, and 1 ft lower than T-rd. E.; at offset crossroads; on concrete headwall of culvert; chiseled cross 198.54

Red Oak, 3.9 mi NW. of; 28 ft S. of telephone pole No. 154; 25 ft E. of, and 1 ft above junction of T-rd. W.; in concrete post; standard tablet stamped "108 WSM 1955 189" 189.412

Reference mark; 0.20 mi N. of tablet; 20 ft E. of hwy.; on N. end of concrete culvert; chiseled cross 150.80

Red Oak, 5.6 mi NW. of; 4.0 mi SE. of Aventon; 270 ft N. of, and 2 ft lower than crossroad; 25 ft E. of State Highway 43; in center of concrete headwall of culvert; standard tablet stamped "109 WSM 1955 188" 188.013

Reference mark; 55 ft SW. of tablet; on S. end of concrete headwall of culvert; chiseled cross 188.37

U.E., Red Oak, 6.9 mi NW. of; at drain; 20 ft E. of hwy.; on S. end of concrete headwall of culvert; chiseled square 194.26

Aventon, 2.3 mi SE. of; 0.1 mi NW. of Ricks Store; 0.11 mi NW. of junction of rd. SE. to Salem; at drain; 25 ft SW. of State Highway 43; in N. end of W. concrete headwall of culvert; standard tablet stamped "110 WSM 1955 204" 203.588

5	ESSEX	NGVD 29 Elevations	NORTH CAROLINA	36-077-33
	Book AV 424			W. S. Monk
				1955
	<u>LINE 2 (Cont'd.)</u>			<u>Feet</u>
	Reference mark; 0.1 mi SE. of tablet; on W. end of concrete headwall of culvert; chiseled cross			218.95
	U.E., Ricks School, 120 ft N. of; 13 ft W. of, and level with rd.; in root on SE. side of 12-in. oak tree; rail spike			210.64
	Avonton, 1.6 mi E. of, thence 0.9 mi SE.; 6.5 mi W. of Hickory; 0.12 mi E. of junction of rd. S.; 0.11 mi SW. of cemetery on N. side of rd.; 25 ft S. of rd.; in concrete post; standard tablet stamped "111 WSM 1955 207"			206.629
	Reference mark; 0.12 mi W. of tablet; 150 ft S. and 20 ft E. of, and 3 ft lower than junction of rd. S.; in root on NW. side of 20-in. elm tree; copper nail and washer			179.849
	U.E., Hickory, 5.7 mi W. of; 45 ft SE. of, and level with junction of rd. N.; in root on SE. side of 28-in. oak tree; copper nail and washer			205.48
	Hickory, 4.2 mi W. of; 18 ft N. and 79 ft E. of, and level with T-rd. S.; 20 ft S. of REA pole; in concrete post; standard tablet stamped "112 WSM 1955 212"			211.556
	Reference mark; 45 ft W. of tablet; in root on S. side of 34-in. oak tree; copper nail and washer			211.80
	Salem; 20 ft N. and 35 ft W. of, and 1 ft lower than T-rd. N.; in center of concrete headwall of culvert; standard tablet stamped "113 WSM 1955 188"			188.303
	Reference mark; 210 ft N. of tablet; 25 ft W. of rd.; in root on E. side of 20-in. gum tree; copper nail and washer			192.98
	U.E., Salem, 1.5 mi S. of; 180 ft N. and 20 ft W. of, and 2 ft lower than lane E.; on concrete headwall of culvert; chiseled cross			190.56
	Salem, 2.1 mi S. of; 25 ft N. and 37 ft E. of, and level with crossroad; in concrete post; standard tablet stamped "114 WSM 1955 194"			194.204
	Reference mark; 380 ft S. of tablet; 25 ft W. of rd.; on N. end of concrete headwall of culvert; chiseled cross			191.60
	U.E., Salem, 3.2 mi S. of; on SW. concrete abutment of steel girder bridge crossing Swift Creek; chiseled cross			137.30
	"100 WSM 1955 145" (Described in line 1)			144.974

LINE 3.

W. S. Monk, 1955; Book AV 424

Whitakers, 3.3 mi W. of, thence 0.8 mi NE.; opposite lane leading to house; on land owned by C. D. Mann; 30 ft S. of center of rd.; 18 ft S. of mailbox marked "Elzie Battle-13"; 3 ft W. of extended centerline of lane; 54 ft W. of W. edge of cultivated field; 26 ft WNW. of 10-in. oak tree with triangular blaze; 81 ft ENE. of molasses tree; in concrete post; NGS standard triangulation station disk stamped "MANN 1933"

133.374

LINE 3 (Cont'd.)Feet

Whitakers, 5.6 mi W. of; at Hickory; 27 ft S. and 105 ft W. of, and 1 ft lower than crossroad; 62 ft N. of, and in line with NW. corner of church; in concrete post; standard tablet stamped "116 WSM 1955 137"	137.482
Reference mark; 100 ft SE. of tablet; 115 ft SE. of, and 2 ft above crossroads; at entrance to church; on concrete parapet; chiseled square	140.72
Hickory, 1.7 mi N. of; 0.3 mi N. of Fishing Creek; 79 ft S. of, and 2 ft lower than crossroad; 28 ft W. of State Highway 48; in concrete post; standard tablet stamped "117 WSM 1955 159"	159.176
Reference mark; at concrete bridge crossing Fishing Creek; on SW. end; chiseled cross	122.63
U.E., Hickory, 2.7 mi N. of, thence 0.7 mi W.; 50 ft SW. of, and level with junction of drive S.; in root on NW. side of 20-in. sycamore tree; copper nail and washer	191.28
Hickory, 2.7 mi N. of, thence 1.3 mi W.; 1.3 mi W. of Glenview; 0.3 mi E. of I-rd. S.; 28 ft N. of rd.; 12 ft E. of lane N.; in centerline of, and 2 ft lower than lane S.; in concrete post; standard tablet stamped "118 WSM 1955 198"	198.150
Reference mark; 30 ft W. of tablet; in root on SW. side of 12-in. gum tree; copper nail and washer	198.04
U.E., Glenview, 2.5 mi W. of; 20 ft E. of, and 1 ft lower than junction of lane NE.; on concrete pipe culvert; chiseled cross	243.83
Glenview, 3.1 mi NW. of; 6.1 mi NE. of Aventon; 430 ft N. and 105 ft W. of, and level with crossroad; at White Oak Rosenwald School; in concrete step; standard tablet stamped "119 WSM 1955 254"	253.808
Reference mark; 85 ft E. of tablet; in root on E. side of 8-in. elm tree; copper nail and washer	252.22
Aventon, 5.0 mi NE. of; at drain; in SW. abutment of concrete bridge; standard tablet stamped "E 119 WSM 1955 138"	137.844
Reference mark; 200 ft E. of tablet; on SE. concrete abutment; chiseled cross	137.79
U.E., Aventon, 3.9 mi NE. of; 60 ft N. of, and level with drive SW.; 20 ft W. of NW. corner of tobacco barn; in root on W. side of 20-in. oak tree; copper nail and washer	202.96
Aventon, 2.8 mi NE. of; 4.4 mi S. of Hollister; 28 ft S. and 60 ft E. of, and 1 ft lower than crossroad; 20 ft N. of power pole; 140 ft E. of NE. corner of IFA Store; in concrete post; standard tablet stamped "120 WSM 1955 200"	200.037
Reference mark; 150 ft N. of tablet; 18 ft E. of rd. N.; on E. end of concrete pipe culvert; chiseled cross	195.49
U.E., Hollister, 4.2 mi S. of; 110 ft S. and 20 ft W. of, and level with intersection of rd. N.-S. and lane E.-W.; in face on E. side of 6-in. oak tree; rail spike	199.12
Hollister, 3.2 mi S. of; 20 ft N. and 90 ft E. of, and 1 ft lower than I-rd. E. to Ringwood; 2 ft W. of power pole; in concrete post; standard tablet stamped "121 WSM 1955 217"	217.398

LINE 3 (Cont'd.)Feet

Reference mark; 300 ft NW. of tablet; 70 ft W. of rd. N.; in root on S. side of 12-in. walnut tree; copper nail and washer	219.90
U.E., Hollister, 2.0 mi S. of; 65 ft NE. of, and 1 ft lower than T-rd. W.; in face on SW. side of 10-in. oak tree; rail spike	248.34
Hollister, 1.5 mi S. of; 140 ft N. and 30 ft E. of, and 1 ft above junction of Y-rd. NE.; 3 ft N. of power pole; in concrete post; standard tablet stamped "122 WSM 1955 238"	238.380
Reference mark; 75 ft S. of tablet; in face on W. side of 14-in. oak tree; rail spike	238.98
<u>Jogs into Littleton quadrangle</u>	
Hollister, 3.0 mi E. of; 2.0 mi S., thence 2.7 mi W. of Brinkleyville; 28 ft SW. of, and 1 ft lower than rd.; 22 ft SE. of drive SW.; 6 ft W. of 32-in. oak tree; in concrete post; standard tablet stamped "124 WSM 1955 182"	182.154
Reference mark; 6 ft SE. of tablet; in root on NE. side of 32-in. oak tree; copper nail and washer	182.20
U.E., Hollister, 4.6 mi E. of; 160 ft N. and 90 ft E. of junction of lane N.; on concrete base for steps at Medoc Lookout Tower; chiseled cross	312.20
Brinkleyville, 2.0 mi S. of; 20 ft S. and 130 ft W. of, and 1 ft above crossroad; 35 ft N. of power pole; in concrete post; standard tablet stamped "125 WSM 1955 281"	281.047
Reference mark; 190 ft W. of tablet; in face on N. side of 9-in. elm tree; rail spike	279.07
U.E., Brinkleyville, 2.0 mi S. of, thence 0.7 mi E.; 60 ft N. of, and 1 ft lower than junction of drive NE.; in root on SW. side of 28-in. oak tree; copper nail and washer	254.34
Brinkleyville, 2.0 mi S. of, thence 1.2 mi E.; 20 ft S. of, and 2 ft above rd.; 18 ft N. of power pole; 16 ft E. of field rd. S.; in concrete post; standard tablet stamped "126 WSM 1955 259"	259.054
Reference mark; 720 ft E. of tablet; on S. end of concrete pipe culvert; chiseled cross	242.22
U.E., Brinkleyville, 2.0 mi S. of, thence 2.2 mi SE.; 30 ft NE. of, and 2 ft lower than lane SW.; at drive NE.; on W. end of concrete pipe culvert; chiseled cross	200.47
Brinkleyville, 2.0 mi S. of, thence 3.0 mi SE.; 30 ft N. and 260 ft W. of, and 5 ft lower than junction of Hollister and Ringwood Roads; in E. end of concrete headwall of culvert; standard tablet stamped "127 WSM 1955 133"	132.999
Reference mark; 55 ft S. of tablet; on S. end of concrete pipe culvert; chiseled square	132.12
U.E., Enfield, 8.5 mi NW. of; 40 ft NW. of, and 3 ft lower than junction of rd. NE.; on W. end of concrete pipe culvert; chiseled cross	171.28

ESSEX  
Book AV 424

NGVD 29  
Elevations

NORTH CAROLINA

36-077-33  
W. S. Monk

1955

LINE 3 (Cont'd.)

Feet

Enfield, 8.0 mi NW. of; on S. side of rd.; on property owned by R. L. Pettitt; in front of residence of C. G. Lee; 64 ft E. of E. edge of porch; 82 ft ESE. of corner of base of chimney; in concrete post; HGS standard triangulation station disk stamped "PETTITT 1933" 219.771

LINE 4.

W. S. Monk, 1955; Book AV 424

U.E., Nashville, 1.0 mi NW. of, thence 1.5 mi N.; on NE. concrete abutment of bridge crossing Pig Basket Creek; chiseled cross 158.48

Nashville, 1.0 mi NW. of, along State Highway 58, thence 2.0 mi N.; 0.27 mi N. of junction of rd. E.; 30 ft W. of, and level with rd.; 2.5 ft SE. of power pole; on iron pipe set in concrete post; USED standard cap stamped "30TH ENGRS MON 16" 185.562

Reference mark; 220 ft SE. of tablet; 18 ft E. of rd.; on NE. corner of L-shaped concrete headwall of culvert; chiseled cross 178.37

U.E., Nashville, 1.0 mi NW. of, thence 3.2 mi N.; 80 ft SE. of, and 1 ft lower than junction of lane W.; on N. end of E. concrete headwall of culvert; chiseled cross 213.63

Nashville, 1.0 mi NW. of, thence 3.5 mi N.; 55 ft N. and 18 ft E. of, and 1 ft lower than lane W.; at drain; in N. end of E. concrete headwall of culvert; standard tablet stamped "129 WSM 1955 225" 225.122

Reference mark; 0.24 mi N. of tablet; 18 ft E. of rd.; on N. end of concrete headwall of culvert; chiseled cross 238.80

Nashville, 1.0 mi NW. of, thence 4.4 mi N.; 0.3 mi S. of Walkers Crossroad; 25 ft W. of rd.; 8 ft SE. of SE. corner of tobacco barn; in concrete post; on iron pipe; USED standard cap stamped "C OF E MON 25" 250.420

Reference mark; 280 ft S. of tablet; 20 ft E. of rd.; at drain; on N. end of E. concrete headwall of culvert; chiseled cross 241.18

Nashville, 1.0 mi NW. of, thence 4.7 mi N.; 100 ft S. and 30 ft E. of, and 2 ft lower than Walkers Crossroad; 29 ft SW. of telephone pole No. 144; in concrete post; on iron pipe; USED standard cap stamped "C OF E MON 26" 245.877

U.E., Dukes; 200 ft S. and 18 ft W. of, and 2 ft lower than T-rd. W.; on S. end of concrete headwall of culvert; chiseled cross 279.72

Dukes, 0.6 mi N. of; 30 ft W. of, and 1 ft lower than junction of I-rd. E.; 7 ft S. of telephone pole No. 196; in concrete post; standard tablet stamped "130 WSM 1955 270" 270.451

Reference mark; 280 ft SE. of tablet; at entrance to brick church; on center of concrete steps; chiseled cross 284.29

Dukes, 1.4 mi N. of; at Taylors Store; 20 ft S. and 470 ft E. of crossroads; on iron pipe in concrete post; USED standard cap stamped "C OF E RM 1 STORE NC 1943" 303.828

9  
ESSEX  
Book AV 424

NGVD 29  
Elevations

NORTH CAROLINA

36-077-33  
W. S. Monk

1955

LINE 4 (Cont'd.)

Feet

Reference mark; 75 ft E. of tablet; on iron pipe in concrete post; USED standard cap stamped "C OF E RM 3 STORE NC 1943" 302.577

U.E., Dukes, 2.8 mi N. of; 0.7 mi N. of crossroad; at drain; 30 ft E. of, and 13 ft lower than rd.; on S. end of E. headwall of concrete culvert; chiseled cross 212.93

Dukes, 3.3 mi N. of; 290 ft N. of Swift Creek; 95 ft N. and 19 ft W. of, and 1 ft above rd. E.; 10 ft S. of lane W.; in concrete post; standard tablet stamped "131 WSM 1955 168 TT" 167.834

*5/17/2000 Probably Lost - AREA Cut Down for Road Improvements*  
Reference mark; 540 ft S. of tablet; on SW. end of concrete bridge crossing Sandy Creek; chiseled cross 166.74

[Jogs into Castalia quadrangle]

U.E., Essex, 5.3 mi SW. of; 0.7 mi W. of Fishing Creek; 200 ft W. of, and 4 ft lower than drive NW.; on N. end of concrete pipe culvert; chiseled cross 193.82

Essex, 4.4 mi SW. of; 215 ft NE. of Fishing Creek; 30 ft NW. of rd.; 20 ft NE. of woods rd. NW.; in concrete post; standard tablet stamped "134 WSM 1955 160 TT" 160.187

Reference mark; 0.11 mi SW. of tablet; 370 ft SW. of center of steel girder bridge crossing Fishing Creek; 20 ft SE. of rd.; in face on NW. side of 14-in. gum tree; rail spike 153.66

U.E., Essex, 3.7 mi SW. of; 30 ft SW. and 20 ft NW. of, and 3 ft above junction of lane SE.; in root on S. side of 15-in. oak tree; rail spike 256.21

Essex, 2.0 mi SW. of; 80 ft N. and 30 ft W. of, and 1 ft lower than junction of State Highways 43 and 561; 60 ft N. of center of triangle formed by Y-rd. junction; 2 ft W. of power pole; in concrete post; standard tablet stamped "135 WSM 1955 300 TT" 300.088

Reference mark; 0.11 mi S. of tablet; 20 ft W. of rd.; on S. end of concrete headwall of culvert; chiseled cross 289.93

Essex; 1.5 mi SW. of; 0.4 mi N. of junction of State Highways 561 and 43; 50 ft E. of Highway 561; in concrete post; USED standard disk stamped "ESSEX NC 43 30TH ENGR" 308.216

LINE 5.

W. S. Monk, 1955; Book AV 424

Essex; 160 ft S. of five point rd. junction; 110 ft SE. and 90 ft SW. of intersection of State Highway 561 and rd. NW.-SE.; at R. P. Harris store and post office; set in NE. corner of concrete walk; standard tablet stamped "139 WSM 1955 274" 274.183

Reference mark; 0.2 mi NW. of tablet; 200 ft NW. of residence; 30 ft SW. of rd.; in root on NW. side of 16-in. oak tree; copper nail and washer 282.57

1955

LINE 6.Feet

W. S. Monk, 1955; Book AV 424

"110 WSM 1955 204" (Described in line 2)

203.588

U.E., Avention, 1.6 mi SE. of; at drain; 20 ft E. of hwy.; on N. end of concrete headwall of culvert; chiseled cross

229.56

Avention, 0.2 mi S. of; 40 ft N. and 62 ft E. of, and 4 ft higher than junction of State Highway 43 and County Road 1507; at offset crossroad; in concrete post; standard tablet stamped "140 WSM 1955 RESET 1976"

286.226 287

U.E., on S. end of concrete pipe culvert; chiseled cross

279.74

Avention, 1.8 mi W. of, along rd. to Wood; 0.2 mi E. of T-rd. S.; at drain; in center of S. headwall of concrete culvert; standard tablet stamped "141 WSM 1955 239" 5/17/2008 - Destroyed HEADWALL GONE!

239.513

Reference mark; 0.3 mi W. of tablet; 20 ft S. and 230 ft E. of, and 1 ft above T-rd. S.; in face on E. side of 14-in. oak tree; rail spike

272.52

LINE 7.

C. R. Henkle, 1972; Book AV 1630

1 46 20.71 Brinkleyville; 2.0 mi S. of intersection of State Highways 561 and 48, along State Highway 48; 173.0 ft E. and 88.6 ft S. of, and 3.9 ft lower than crossroad; in center of gas pump island at Lynch's Grocery; standard tablet stamped "69 CRH 1972 276", painted "BM 276.2"

276.208 281

1 47 21.42 Brinkleyville; 2.0 mi S. of intersection of State Highways 561 and 48, along State Highway 48, thence 0.7 mi SE. along County Road 1002; 35.8 ft NE. of, and 1.1 ft higher than rd.; 2.2 ft SE. of powerline pole; 1.0 ft SW. of witness sign; in concrete post flush with ground; standard tablet stamped "70 CRH 1972 256", painted "BM 256.0"

256.059 259

1 49 22.44 Brinkleyville; 2.0 mi S. of intersection of State Highways 561 and 48, along State Highway 48, thence 1.7 mi SE. along County Road 1002; 27.6 ft NE. of and 1.2 ft lower than rd.; 3.9 ft SW. of powerline pole #13-109; 1.5 ft SW. of witness sign; in concrete post flush with ground; standard tablet stamped "71 CRH 1972 227", painted "BM 226.5"

226.504

1 50 23.09 U.E., in centerline of rd. at drive NE.; nail and washer, painted "UE CL 178.1"

178.17

1 51 23.67 Brinkleyville, 2.0 mi S. of, thence 3.0 mi SE.; 30 ft N. and 260 ft W. of, and 5 ft lower than junction of Hollister and Ringwood Roads; in E. end of concrete headwall of culvert; standard tablet stamped "127 WSM 1955 133" (Also described in line 3)

132.999

1 53 24.20 U.E., Enfield, 8.5 mi NW. of; 40 ft NW. of, and 3 ft lower than junction of rd. NE.; on W. end of concrete pipe culvert; chiseled cross

171.28

1 54 24.84 "PETTITT 1933" (NGS) (Triangulation station) (Described in line 3)

219.771